

Wireless Temperature, Humidity and TVOC sensor (BW-THVOC-M)

The BW-THVOC-M is a wireless temperature, humidity and CO2 sensor for use in indoor environments for monitoring control. The sensor works with the suite of Optergy Air sensors when connected to an Optergy Air Transceiver (BG-1000-M). Up to seven (7) sensors can be connected to one Optergy Air Transceiver (BG-1000-M).




OVERVIEW

Multi-sensor Connectivity	Up to seven BW-THCO2-M wireless sensors can be connected to one BG-1000-M transceiver.
Quick & Easy Installation	As a wireless sensor, there are no power or signal cables to run.
Long-lasting Battery Powered	The sensor uses standard and easily replaceable AA batteries with reliable usage for up to 5 years. The battery life is viewable within the Optergy ecosystem.
No hidden fees	No special software license needed to operate.

HARDWARE SPECIFICATIONS



Sensing Technology	Semiconductor based sensor - digital humidity and TVOC sensor with built-in temperature sensor
Temperature Accuracy	$\pm 0.2^{\circ}\text{C}$ / $\pm 0.36^{\circ}\text{F}$ (typical)
Temperature Resolution	14 bits
Relative Humidity Accuracy	$\pm 2\%$ (typical)
Relative Humidity Resolution	11 bits
TVOC Accuracy	$\pm 5\%$
TVOC Range	0 to 1000000 ppb
TVOC Module Response Time	10 seconds
Battery Life	> 5 years (low battery indicator)
Data Interval	1 minute (TVOC), 15 seconds (Temperature & Humidity)
Battery Type	3 x 3.6V 2700mAh lithium (AA)
Radio Frequency	2.4 GHz
Working Voltage	3.3V
Working Current	Average < 1mA
Standby Current	< 3uA
Scope of Application	Indoor use
Detection Range	Ambient temperature -40°C to 60°C / -40°F to 140°F and humidity 0 to 95% (without condensation)
Working Temperature	-20°C to 60°C / -4°F to 140°F
Transmission Distance	Up to 30 meters / 100 feet
Dimensions	W 68 mm (2.6 in.) x L 112 mm (4.4 in.) x H 29 mm (1.1 in.)
Weight	50 grams (.11 pounds)
Model Number	BW-THVOC-M (Temperature, Humidity and TVOC, Multi)

DIMENSIONS

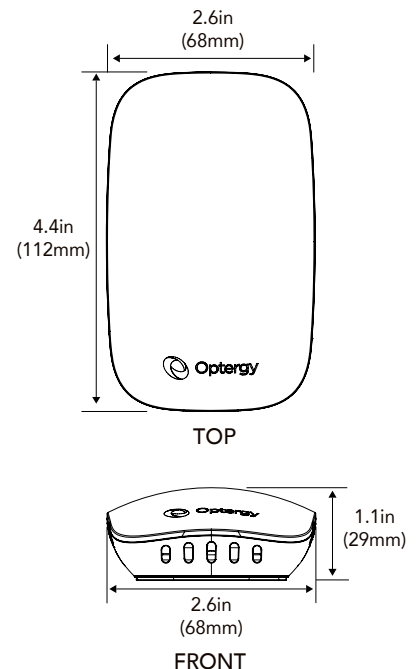

FCC & CE: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

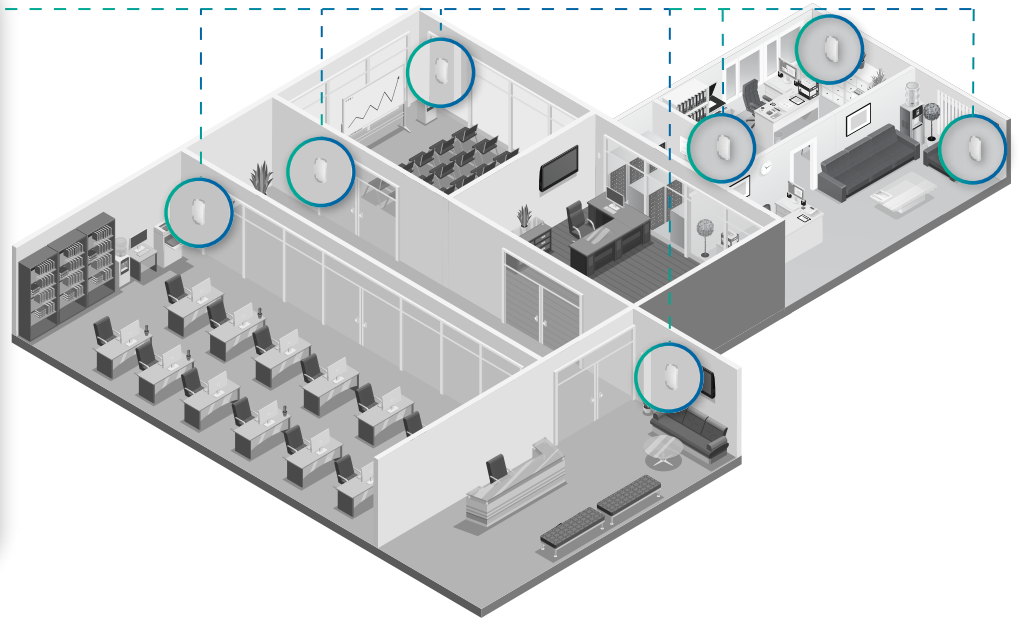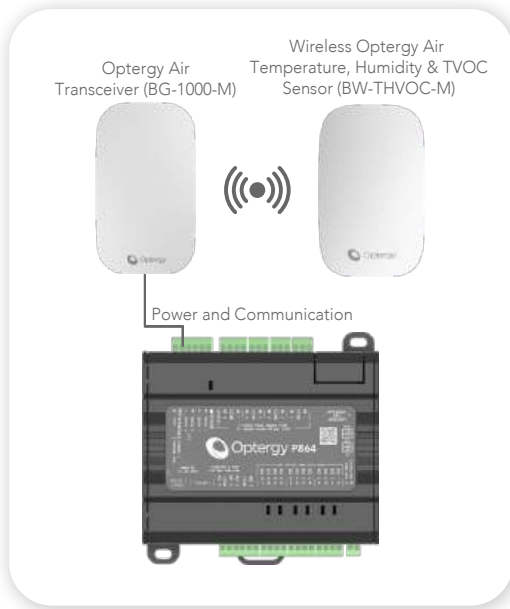

The Optergy Air BW-THVOC-M sensor pairs with the Optergy Air Transceiver (BG-1000-M). Up to seven (7) Optergy Air BW-THVOC-M sensors can be connected to one Optergy Air Transceiver (BG-1000-M).

Alternatively, the Optergy Air BW-THVOC-M sensor can be connected to the Optergy Air Transceiver (BG-1000-M) in an ecosystem with a mixture of other Optergy Air sensors for a total of seven (7) Optergy Air sensors per one (1) Optergy Air Transceiver (BG-1000-M).

When used in conjunction with the P864 and the BG-1000-M, this device will transmit space temperature, humidity, and carbon dioxide values to the BACnet system. The data points for these values are associated with the connected device. The following BACnet points are included:


BACNET POINTS

The sensor points (temperature, humidity & TVOC levels) are instantiated by the Optergy P864. These points are reserved for wireless sensors and will have BACnet values corresponding to the device instance of the Optergy P864. The reserved points include:

- Temperature Value (Deg F or Deg C)
- Humidity Value (%rH)
- Total Volatile Organic Compound (ppb)
- Battery Level
- Low Battery Level Warning
- Sensor Online
- Sensor Paired

ACCESSORIES (BY OTHERS)

AA Batteries



The BW-THVOC-M device requires 3 3.6V lithium AA batteries (not included). While the product will work with regular alkaline batteries, the long battery life can only be achieved with 3.6V lithium batteries with a capacity of at least 2700mAh.

Rechargeable batteries are not recommended.